


Fișă tehnică produs

Specificatii



Unitate de Franare Rezistiva, 100 Ohmi, 0.1kW, IP20

VW3A7730

Principale

gama de produse	Altivar
Compatibilitate gama	Altivar Process ATV900 Altivar Machine ATV340 Altivar Machine ATV320 Easy Altivar 310 Easy Altivar 310L
Tip produs sau componenta	Rezistenta de rupere
valoare ohmica	100 Ohm

Suplimentare

Declinare de responsabilitate: Această documentație nu se substituie și nu trebuie utilizată pentru stabilirea adecvării sau fiabilității acestor produse pentru aplicații utilizator

compatibilitate produs	Variable speed drive ATV930 wall mount 0,75 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 1,5 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 2,2 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 3 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 4 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 0,75 kW 200...240 V light cycle Variable speed drive ATV950 wall mount 0,75 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 1,5 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 2,2 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 3 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 4 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 0,75 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 1,5 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 0,75 kW 200...240 V medium cycle Variable speed drive ATV950 wall mount 0,75 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 1,5 kW 380...480 V medium cycle Variable speed drive ATV340 0,75 kW 380...480 V light cycle Variable speed drive ATV340 1,5 kW 380...480 V light cycle Variable speed drive ATV340 2,2 kW 380...480 V light cycle Variable speed drive ATV340 3 kW 380...480 V light cycle Variable speed drive ATV340 0,75 kW 380...480 V medium cycle Variable speed drive ATV320 0,18 kW 200...240 V Variable speed drive ATV320 0,37 kW 200...240 V Variable speed drive ATV320 0,37 kW 380...480 V Variable speed drive ATV320 0,55 kW 380...480 V Variable speed drive ATV320 0,75 kW 380...480 V Variable speed drive ATV320 1,1 kW 380...480 V Variable speed drive ATV320 1,5 kW 380...480 V Variable speed drive ATV320 2,2 kW 380...480 V Variable speed drive ATV320 3 kW 380...480 V Variable speed drive ATV310 1,5 kW Variable speed drive ATV310 2,2 kW Variable speed drive ATV310 3 kW Variable speed drive ATV310 4 kW Variable speed drive ATV930 2,2 kW 500...690 V light cycle Variable speed drive ATV930 3 kW 500...690 V light cycle Variable speed drive ATV930 4 kW 500...690 V light cycle Variable speed drive ATV930 5,5 kW 500...690 V light cycle Variable speed drive ATV930 3 CP 600 V light cycle Variable speed drive ATV930 5 CP 600 V light cycle Variable speed drive ATV930 7,5 CP 600 V light cycle Variable speed drive ATV930 2,2 kW 500...690 V medium cycle Variable speed drive ATV930 3 kW 500...690 V medium cycle Variable speed drive ATV930 3 CP 600 V medium cycle Variable speed drive ATV320 0,75 kW 525...600 V Variable speed drive ATV320 1,5 kW 525...600 V Variable speed drive ATV320 2,2 kW 525...600 V Variable speed drive ATV320 4 kW 525...600 V Variable speed drive ATV310L 0,75 kW Variable speed drive ATV310L 1,5 kW Variable speed drive ATV310L 2,2 kW Variable speed drive ATV310L 3,0 kW Variable speed drive ATV310L 4,0 kW Variable speed drive ATV310L 5,5 kW
ciclu de utilizare	Light cycle (pentru sarcini grele) <0,8 s braking with 150 % braking torque for a 40 s cycle Light cycle (serviciu normal) <0,8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (serviciu normal) <4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (pentru sarcini grele) <4 s braking with 165 % braking torque for a 40 s cycle
putere medie disponibila	0,1 kW la 50 °C
conexiune electrica	borna, capacitate conexiune: <= 10 mm² / AWG 8 pentru variator
tip de protectie	Thermal protection via drive
latime	105 mm
inaltime	295 mm
adancime	100 mm
greutate produs	1,5 kg

Mediu

grad de protectie IP	IP20
temperatura ambietala pentru depozitare	-25...70 °C
temperatura ambientala de functionare	0...50 °C

Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar unitati in prima forma de impachetare	1
Inaltime prima forma de impachetare	11,500 cm
Latime prima forma de impachetare	31,500 cm
Lungime prima forma de impachetare	17,500 cm
Greutate prima forma de impachetare	1,714 kg
Unitate de masura pentru a doua forma de impachetare	P06
Numar unitati in a doua forma de impachetare	33
Inaltime a doua forma de impachetare	75,000 cm
Latime a doua forma de impachetare	60,000 cm
Lungime a doua forma de impachetare	80,000 cm
Greutate a doua forma de impachetare	63,011 kg

Garanție contractuală

Garantie	18 luni
----------	---------



Environmental Data

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

Use Better

Materiale si ambalare	
Pachet cu carton reciclabil	Nu
Ambalaj fara plastic	Nu
Directiva RoHS UE	Conformitate proactiva (Produs in afara domeniului de aplicare a EU RoHS)
Regulamentul REACH	Declaratia REACH


Use Again

Reambalare si refabricare	
Preluare la sfarsitul duratei de viata	No

Dimensions Drawings

Dimensions

Right Side and Front View

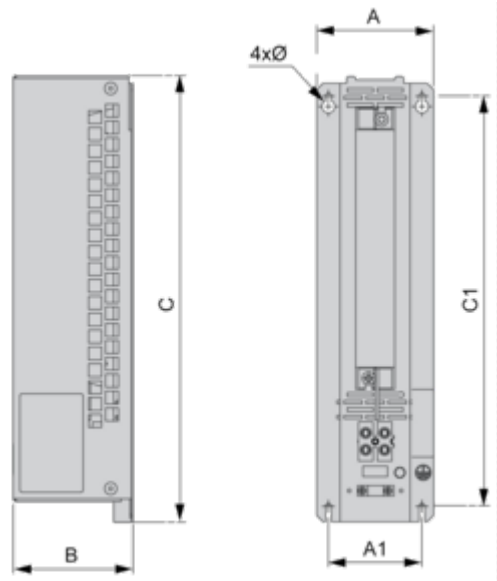

Dimensions in mm

A	B	C	A1	C1	Ø
105	100	295	72	266	4.5

Dimensions in in.


A	B	C	A1	C1	Ø
4.13	3.94	11.61	2.83	10.47	0.18

Mounting and Clearance

Mounting and Clearance




(1) Braking resistor

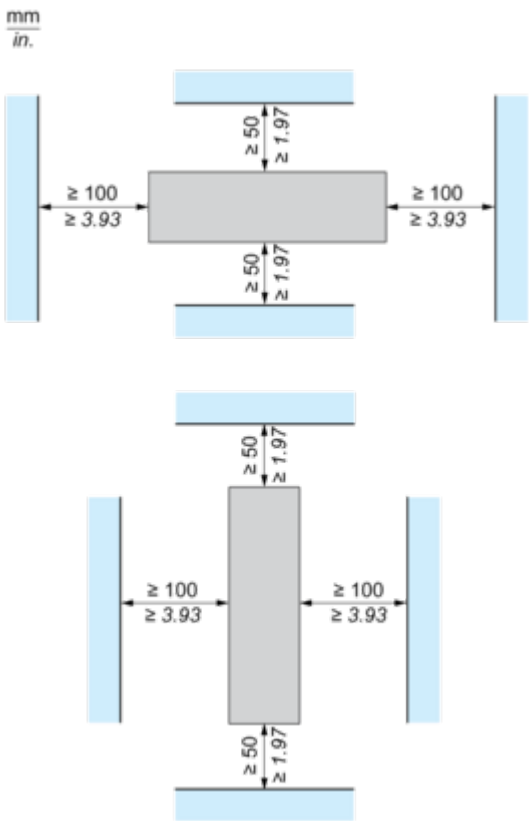

Connections and Schema

Recommended Schema

1 Braking Resistor

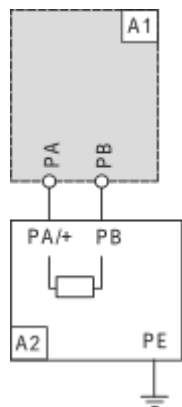


A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

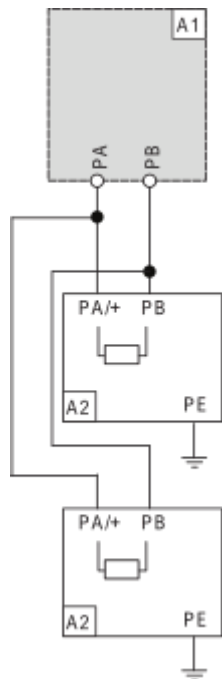

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC