

Fișă tehnică produs

Specificatii



Filtru iesire dv/dt pentru unitate viteza variabila, IP20

VW3A5305

Principale

Tip produs sau componenta	Dv/dt filter
Compatibilitate gama	Easy Altivar 610 Altivar Process ATV900 Altivar Process ATV600 Altivar Machine ATV340
aplicatie specifica produsului	Filtru de iesire
[In] calibru	95 A
compatibilitate produs	ATV630 variable speed drive wall mount - 15 kW, 200...240 V ATV630 variable speed drive wall mount - 18,5 kW, 200...240 V ATV630 variable speed drive wall mount - 22 kW, 200...240 V ATV630 variable speed drive wall mount - 30 kW, 380...480 V ATV630 variable speed drive wall mount - 37 kW, 380...480 V ATV630 variable speed drive wall mount - 45 kW, 380...480 V ATV650 variable speed drive wall mount - 30 kW, 380...480 V ATV650 variable speed drive wall mount - 37 kW, 380...480 V ATV650 variable speed drive wall mount - 45 kW, 380...480 V ATV610 variable speed drive - 30 kW, 380...415 V ATV610 variable speed drive - 37 kW, 380...415 V ATV610 variable speed drive - 45 kW, 380...415 V ATV930 variable speed drive wall mount - 15 kW, 200...240 V ATV930 variable speed drive wall mount - 18,5 kW, 200...240 V ATV930 variable speed drive wall mount - 22 kW, 200...240 V ATV930 variable speed drive wall mount - 30 kW, 380...480 V ATV930 variable speed drive wall mount - 37 kW, 380...480 V ATV930 variable speed drive wall mount - 45 kW, 380...480 V ATV950 variable speed drive wall mount - 30 kW, 380...480 V ATV950 variable speed drive wall mount - 37 kW, 380...480 V ATV950 variable speed drive wall mount - 45 kW, 380...480 V
cantitate Incorporata	1

conexiune electrica	Bloc de conexiuni, capacitate conexiune: 50 mm² / AWG 1
---------------------	---

Suplimentare

lungimea maxima a cablului motorului	500 m cablu neecranat 300 m cablu ecranat
dv/dt	3000 V/µs maxim la 200...240 V 3000 V/µs maxim la 380...480 V
pierderi termice	92 W la 4 kHz
maximum drive output frequency	100 Hz
temperatura ambientala de utilizare	-10...50 °C (fără declasarea curentului) 50...60 °C (cu diminuarea curentului cu 1.5% par °C)
altitudinea de functionare	0...1000 m fără declasarea curentului 1000...4000 m cu declasarea curentului cu 1 % pe 100 m
latime	300 mm
inaltime	610 mm

Declinare de responsabilitate: Această documentație nu se substituie și nu trebuie utilizată pentru stabilirea adecvării sau fiabilității acestor produse pentru aplicații utilizator

adancime	245 mm
greutate produs	19 kg

Mediu

grad de protectie IP	IP20 IP21 (with kit VW3A53905)
temperatura ambietala pentru depozitare	-40...70 °C

Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar unitati in prima forma de impachetare	1
Inaltime prima forma de impachetare	40,000 cm
Latime prima forma de impachetare	40,000 cm
Lungime prima forma de impachetare	75,000 cm
Greutate prima forma de impachetare	24,000 kg

Garanție contractuală

Garantie	18 luni
----------	---------



Environmental Data

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

Use Better


Materiale si ambalare	
Pachet cu carton reciclabil	Nu
Ambalaj fara plastic	Nu
Directiva RoHS UE	Conformitate proactiva (Produs in afara domeniului de aplicare a EU RoHS)
Regulamentul REACH	Declaratia REACH

Use Again

Reambalare si refabricare	
Preluare la sfarsitul duratei de viata	No

Dimensions Drawings

Dimensions

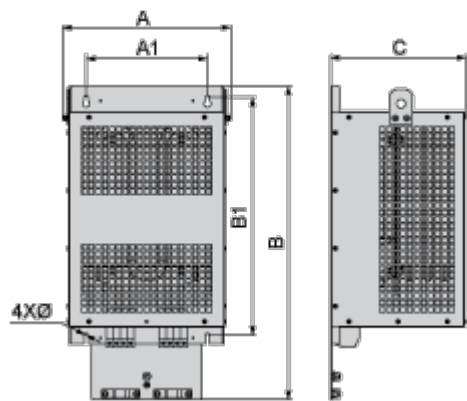

Dimensions in mm

A	B	C	A1	B1	Ø
300	590	245	210	411	7

Dimensions in in.


A	B	C	A1	B1	Ø
11.8	23.2	9.6	8.3	16.2	0.28

Mounting and Clearance

Mounting and Clearance




(1) Filter

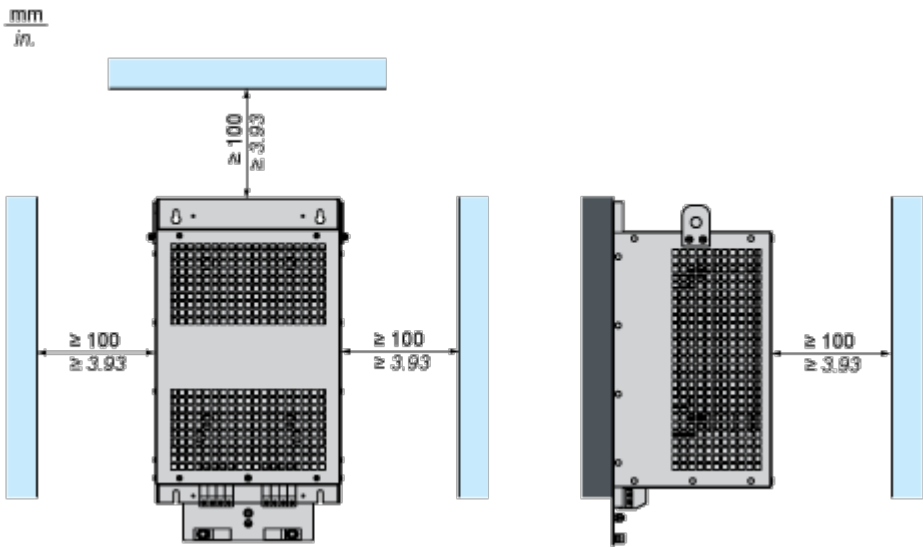

Connections and Schema

Recommended Schema

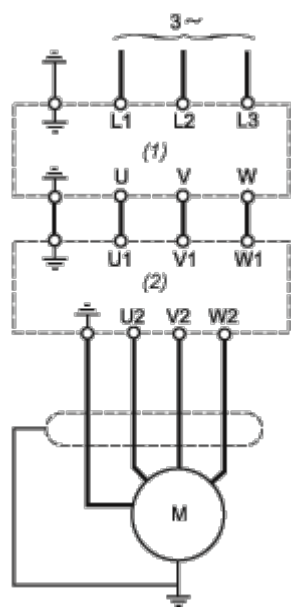

- (1) Drive
- (2) Filter